


Closed Body Rigging Screws Jaw & Jaw

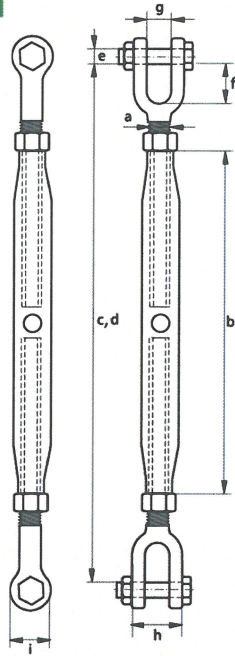

Material	Mild steel
Safety Factor	MBL equals 5 x WLL
Finish	Hot dipped galvanised
Certification	As standard; EC Declaration of Conformity Upon request; 2.1, 2.2
Note	End fittings of 6 and 8mm rigging screws are electro galvanised

WLL	Diameter	Length	Length	Length	Diameter	Length	Opening	Width	Diameter	Diameter	Product	Weight
	Thread	Body	Closed	Open	Pin	Inside	Jaw	Jaw	Jaw Eye	Hole	Code	Each
t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm		kg
0.2	6	100	170	250	5	16	7	20	13	6	64101B	0.15
0.32	8	108	199	279	6	22	9	24	14	8	64102B	0.26
0.5	10	125	222	312	8	22	10.5	28	19	8	64103B	0.45
0.7	12	195	315	470	10	27	13	34	23	10	64104B	0.85
1.2	16	230	388	568	12	33	18	42	29	11	64105B	1.51
1.5	20	270	449	654	16	38	20	51	33	12	64106B	2.62
2.2	22	295	490	715	20	45	25	55	38	12	64107B	3.94
3.2	24	325	538	793	22	52	30	70	46	12	64108B	5.16
4.8	33	370	680	965	30	70	38	82	60	14	64110B	11.60
6	39	400	707	1002	33	70	45	85	76	15	64111B	14.20
8.5	45	400	761	1011	39	86	50	94	85	16	64112B	20.80
11	48	400	780	1005	45	97	58	98	92	16	64113B	24.00