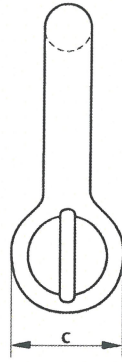
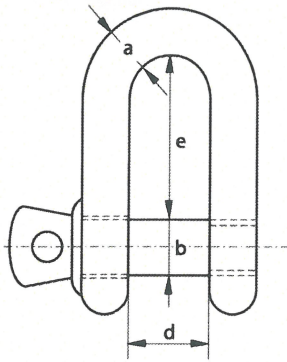


BLT

Small Dee Shackle

with Type A, Screw Collar Pin

**Material**

Body and pin, EN14 or equal

Safety Factor

MBL equals 5 x WLL

Standard

Generally to BS3032 table 1 - 1958

Finish

Self colour or hot dipped galvanised

CertificationAs standard; EC Declaration of Conformity
Upon request; certificate of basic raw material

| WLL | Diameter Bow | Diameter Pin | Diameter Eye | Inside Width | Inside Length | Product | Product | Weight Each |
|-------|-----------------|-----------------|-----------------|-----------------|------------------|-------------|------------|----------------|
| | | | | | | Code | Code | |
| tons | a inch | b inch | c inch | d inch | e inch | Self Colour | Galvanised | kg |
| 0.30 | 1/4 | 3/8 | 3/4 | 3/8 | 7/8 | 10201A | 11201A | 0.06 |
| 0.60 | 3/8 | 1/2 | 1 | 5/8 | 1.3/8 | 10202A | 11202A | 0.15 |
| 1.00 | 1/2 | 5/8 | 1.1/4 | 7/8 | 1.7/8 | 10203A | 11203A | 0.33 |
| 1.75 | 5/8 | 3/4 | 1.1/2 | 1" | 2.1/4 | 10204A | 11204A | 0.61 |
| 2.50 | 3/4 | 7/8 | 1.3/4 | 1.1/4 | 2.3/4 | 10205A | 11205A | 0.93 |
| 3.50 | 7/8 | 1 | 2 | 1.3/8 | 3.1/4 | 10206A | 11206A | 1.50 |
| 4.50 | 1 | 1.1/8 | 2.1/4 | 1.1/2 | 3.5/8 | 10207A | 11207A | 2.15 |
| 5.50 | 1.1/8 | 1.1/4 | 2.1/2 | 1.3/4 | 4.1/8 | 10208A | 11208A | 3.02 |
| 7.00 | 1.1/4 | 1.3/8 | 2.3/4 | 1.7/8 | 4.1/2 | 10209A | 11209A | 4.20 |
| 8.00 | 1.3/8 | 1.1/2 | 3 | 2.1/8 | 5 | 10210A | 11210A | 5.34 |
| 10.75 | 1.1/2 | 1.3/4 | 3.1/2 | 2.3/8 | 5.1/2 | 10211A | 11211A | 8.36 |
| 13.00 | 1.5/8 | 1.7/8 | 3.3/4 | 2.1/2 | 5.7/8 | 10212A | 11212A | 9.35 |
| 14.75 | 1.3/4 | 2 | 4 | 2.3/4 | 6.3/8 | 10213A | 11213A | 12.39 |
| 16.75 | 1.7/8 | 2.1/8 | 4.1/4 | 2.7/8 | 6.3/4 | 10214A | 11214A | 15.30 |
| 19.00 | 2 | 2.1/4 | 4.1/2 | 3 | 7.1/4 | 10215A | 11215A | 18.40 |